

ACE型

GMP対応
GMP-compliant
model

Model ACE


ハイパワー・ケーシング開閉式

High-power casing opening and closing system

- GMP洗浄バリデーション対応。
- ケーシング開閉式。
(但、500型は天板開閉式。900型、1300型は固定式)
- 機内洗浄、ろ材交換、機内の点検、確認が容易。
- 多品種処理に適応。
- サニタリ仕様も可能。
- 1サイクル時間短縮、ハイパワー運転に適応。
- 処理物の性状に応じた回転数で運転可能。
- ろ過面積が広く、大容量。
- メンテナンス費用の削減。
- 共通架台、特殊ダンパーの採用により、基礎荷重の低減。



- Compliant with GMP validation
- Casing opening and closing system (Model 500 incorporates a top opening/closing system. Model 900 and Model 1300 are fixed units.)
- Intra-machinery cleaning, cloth replacement and intra-machinery inspection/checking are easily performed.
- The model is applicable to the treatment of other product categories.
- Sanitary specifications are also available.
- Reduction of cycle time and high-power operation are achieved.
- The model is operable at a number of revolutions as appropriate for the description of the treated substance.
- The model has a broad filtering area and large capacity.
- Containment of maintenance costs is achieved.
- Use of the common base and the special dumper has reduced basic loading.

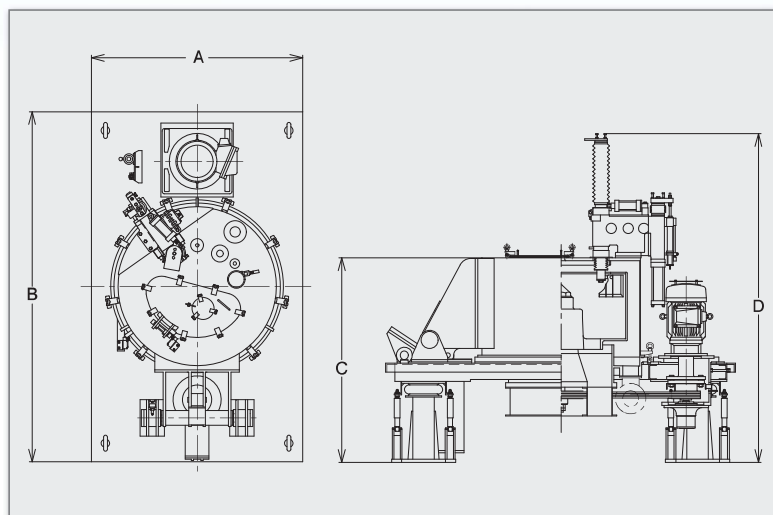

仕様 (Specification)

機械型式 Model	バスケット寸法 Basket size	最大容量 Capacity (ℓ)	回転数 Revolutions per minute (rpm)	遠心効果 Centrifugal effects (G)	モータ Motor (kW)	概算質量 Approximate weight (kg)	概略寸法 (mm) Approximate size			
	直径×深さ (mm) Diameter × Depth						A	B	C	D
ACE- 100	915× 410	105	1250	800	15～ 22	3000	1500	2580	1470	2290
ACE- 200	1070× 540	200	1160	800	15～ 22	4000	1600	2750	1700	2700
ACE- 300	1220× 530	305	1080	800	30～ 37	5500	1750	3000	1700	2700
ACE- 500	1220× 870	500	1080	800	45～ 55	6500	1900	2550	1890	3170
ACE- 900	1520×1000	915	850	614	75～150	11000	2380	3200	2300	3750
ACE-1300	1600×1250	1305	800	572	132～200	14000	2430	3410	2660	4260

※ウェットケーキの見掛け比重が大きい場合は、別途ご相談ください。* Consult with TANABE individually if apparent specific gravity of the wet cake is heavy.
※お引き合い時、詳細資料を提出いたします。* Detailed data will be supplied at the time of inquiry.